

Characteristic of Paint Stop 2,5''

<i>Product:</i>	<i>Paint Stop</i>
<i>Weight:</i>	<i>175 g/m² +/- 20g/m²</i>
<i>Type of media:</i>	<i>Glass fibre</i>
<i>Thickness:</i>	<i>65-75 mm</i>
<i>Maximum operating temperature:</i>	<i>150°C</i>
<i>Flammability:</i>	<i>No significant contribution to fire growth</i>
<i>Standard size of roll:</i>	<i>2 m x 20 m ; 1,5 x 1 m x 20 m ; 0,75 m x 20 m or cut to size according to Customer wishes</i>




Use in:

- Pre-filtration as a contribution to the cassette filter for separating mist in paint shops and powder paint shops,

- As a filter floor.

Glass fiber with progressive construction, green side acts as a side of dust attack.

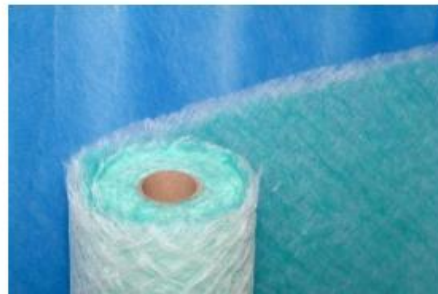

Characteristic of Paint Stop 4''

<i>Product:</i>	<i>Paint Stop</i>
<i>Weight:</i>	<i>325 g/m² +/- 20g/m²</i>
<i>Type of media:</i>	<i>Glass fibre</i>
<i>Thickness:</i>	<i>100 mm</i>
<i>Maximum operating temperature:</i>	<i>150°C</i>
<i>Flammability:</i>	<i>No significant contribution to fire growth</i>
<i>Standard size of roll:</i>	<i>2 m x 20 m ; 1,5 x 1 m x 20 m ; 0,75 m x 20 m or cut to size according to Customer wishes</i>



Use in:

- Pre-filtration as a contribution to the cassette filter for separating mist in paint shops and powder paint shops,*
- As a filter floor.*

Glass fiber with progressive construction, green side acts as a side of dust attack.

